

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/19645 A1

(51) International Patent Classification⁷: B60R 1/06, 1/02

(21) International Application Number: PCT/AU00/01100

(22) International Filing Date:
15 September 2000 (15.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 2834 15 September 1999 (15.09.1999) AU

(71) Applicant (for all designated States except US): BRITAX
RAINSFORDS PTY LTD [AU/AU]; Sherriffs Road,
Lonsdale, S.A. 5160 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MUNYARD, An-
drew, Gordon, Stuart [AU/AU]; Sherriffs Road, Lons-
dale, S.A. 5160 (AU). FIMERI, Gary, Gordon [AU/AU];
Sherriffs Road, Lonsdale, S.A. 5160 (AU).


(74) Agent: MADDERN; Level 1, 64 Hindmarsh Square,
Adelaide, S.A. 5000 (AU).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,


[Continued on next page]

(54) Title: A MIRROR MOUNTING ASSEMBLY FOR CONTROLLING VIBRATION OF A MIRROR

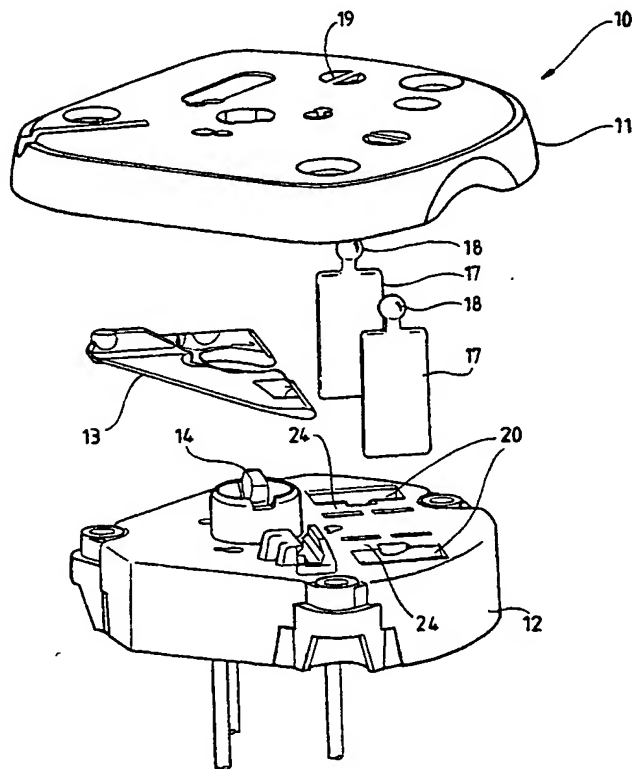

(57) Abstract: A mirror mounting assembly (10) comprising a mirror support (11), a base portion (12), a pivoting joint (13, 14) between the support (11) and the base portion (12), a pivoting joint (13, 14) between the support (11) and the base portion (12) allowing the support (11) to pivot with respect to the base portion (12), a link (17) extending between the support (11) and the base portion (12), a first end of the link (17) being held with respect to either the support (11) or the base portion (12), an aperture (20) provided in the support (11) or the base portion (12) into which the second end of the link (17) locates, a tight sliding fit between the aperture (20) and the link (17), the link (17) moving through the aperture (20) allowing to support (11) to be adjusted with respect to the base portion (12), the fit being such that unwanted movement between the support (11) and base portion (12) is prevented during normal use.

WO 01/19645 A1



WO 01/19645 A1